

K380 FITTING KIT INSTRUCTIONS

These fitting instructions contain information specific for your vehicle. They should be read in conjunction with your crossbar instructions.

Maximum
Whispbar
Load
Rating

75
kg

When Fitted and loaded
correctly

Kit Contains

- 1 x Instructions
- 4 x Red Plastic Knobs with M6 nuts
- 4 x Plastic Internal Blocks
- 4 x Grub Screws
- 1 x Allen Key 3mm
- 4 x Rubber Pads

Items you will require that are not included:

- 1 x Tape measure

Remove parts from box & check
Contact your Prorack dealer if any parts are missing or damaged

Important Note:

Whispbar Through Bars pictured in these instructions, also applicable for Whispbar Flush Bars



1



2



3

- Remove crossbars and fitting kit parts from the packaging
- Follow steps 1 to 3 of crossbar assembly instructions
- Remove clamp block by pressing it backwards
- Select plastic internal block (from fitting kit) and insert it into foot
- Repeat for all four legs



4

- Open trap door as shown
- Note: Trap door shape may vary to the one shown on the picture




5

- Select four M6 x 80mm grub screws and screw them into the centre hole of the fixed point using 3mm Allen Key.
- Do not over tighten.
- Repeat steps 4-5 for all four positions.




6

- Pad part numbers could be found on the underside of the pad.

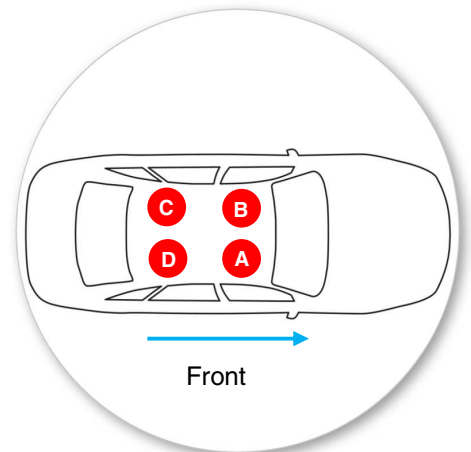

7

- Letters refer to the pad part numbers
- (A) Refers to Pad 11-04-233
- (B) Refers to Pad 11-04-234
- (C) Refers to Pad 11-04-229
- (D) Refers to Pad 11-04-230

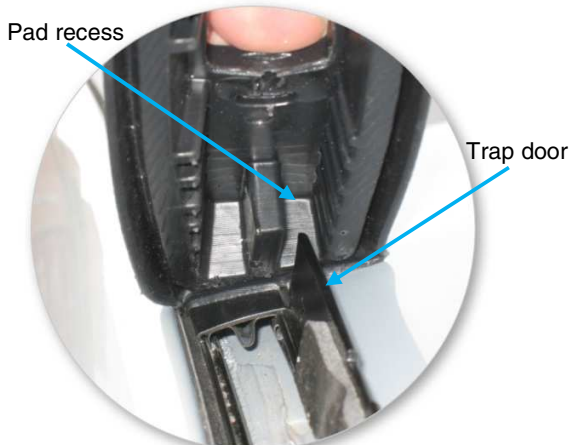

8

- Place pads on roof as per diagram in step 7
- Make sure that the trap door sits vertically in the recess in the pad (as shown)



9

- Place crossbars onto pads insuring that rubber dowels on the pad engage properly in the holes on the foot and that grub screw passes through the hole in internal block.
- Repeat for all four legs



10

- Select red plastic knob and tighten crossbar to grub screw.
- Fully tightened knob should sit in the same position as shown on the picture above to allow cover to close.
- Repeat for all four legs.



11

- Check that crossbars are tight on the roof.
- Refit covers to legs.



Warning Notes:

- Use these instruction in conjunction with crossbar instructions

WARNING: Check the Tightness of Screws Regularly