



YAKIMA® CARGO BOX/HATCH INTERFERENCE FIT TIPS




If your vehicle already has round, square or factory crossbars follow these easy steps...

STEP 1:


If your front crossbar is adjustable* move it forward as far as it will go.

**Do not adjust your crossbars if you have a Yakima Q-Tower rack system.*

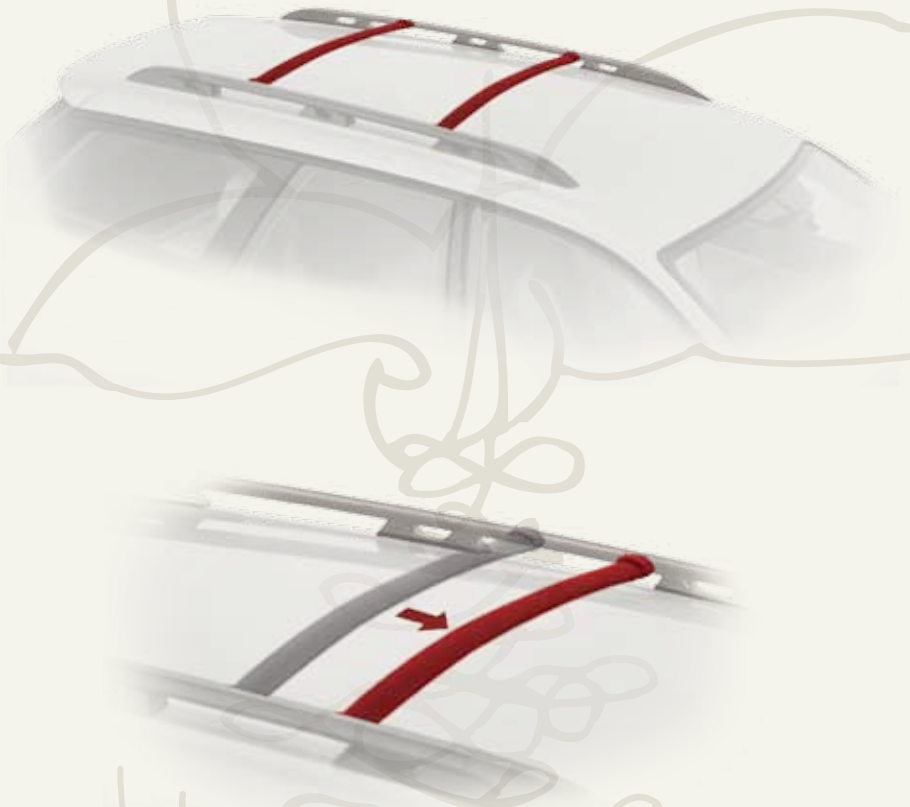

STEP 2:

Measure the distance from the center of your front crossbar to the hatch seam of your vehicle.

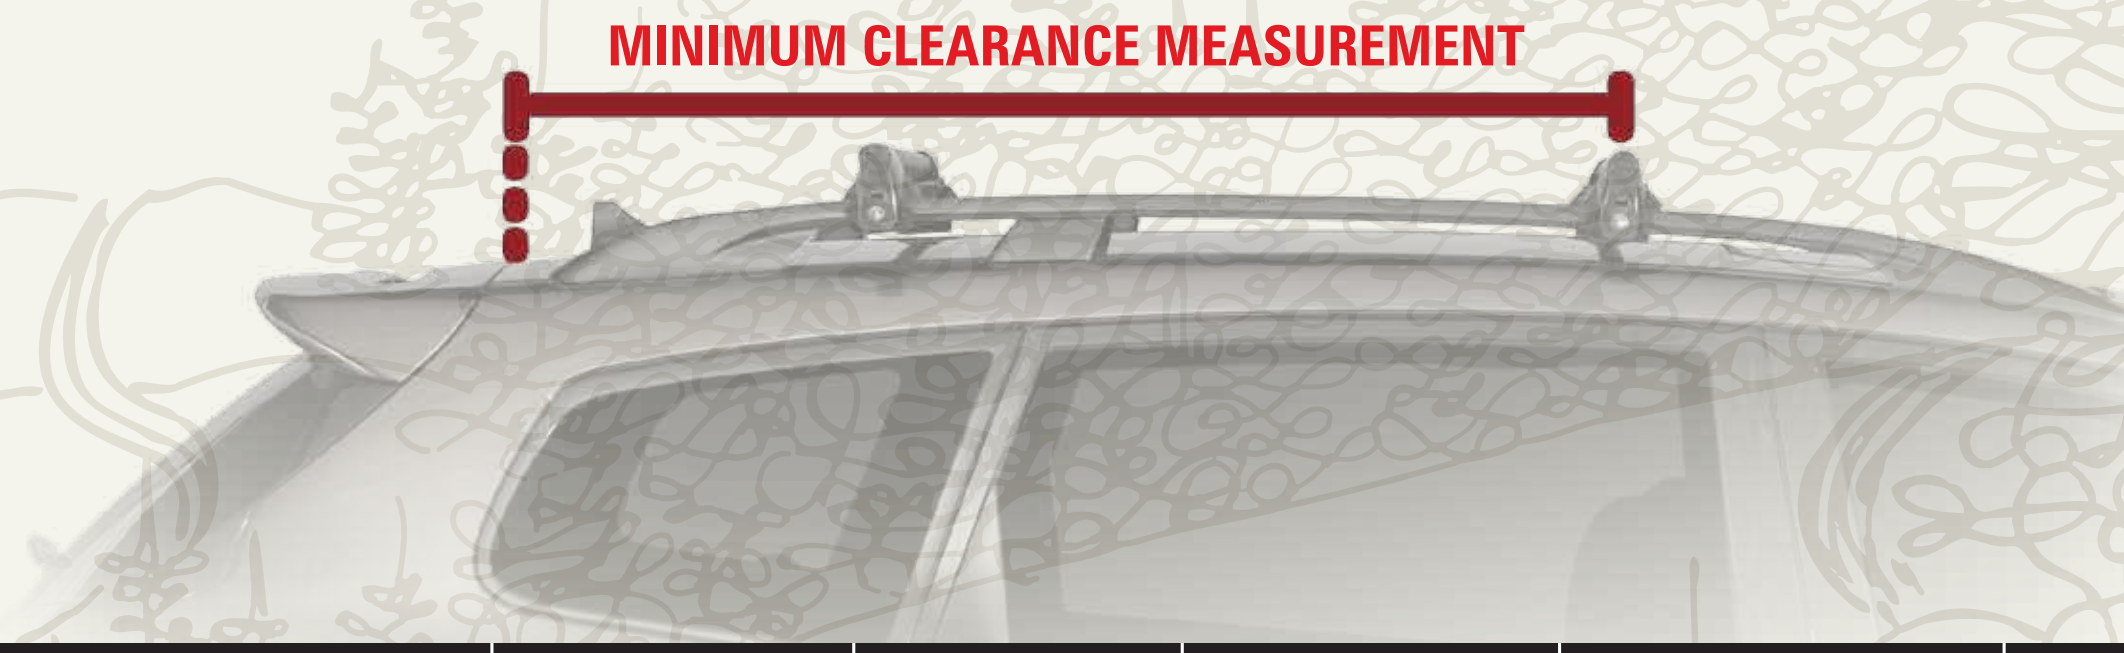

Minimum Clearance	RocketBox 15/ Rocketbox Pro 12	RocketBox Pro 11/14	SkyBox/ SkyBox Pro 16	SkyBox/SkyBox Pro 12/18/21 & LoPro	RocketBox 11/16
40"	X				
45"	X	X			
52"	X	X	X		
57"	X	X	X	X	
62"	X	X	X	X	X



If your vehicle does not already have crossbars...

In order for a cargo box to work on a vehicle's roof, you will need to have an aftermarket rooftop rack system installed. Preferably, Yakima! Getting a rack is easy — visit an authorized Yakima dealer near you, and they can get you racked-out and on the road in no time flat. After you get your rooftop rack system installed, see step 2 above to finish getting your Yakima cargo box road-ready.

FIND A DEALER NEAR YOU NOW - WWW.YAKIMA.COM/FIND-A-DEALER

