

K407 FITTING INSTRUCTIONS

These fitting instructions contain information specific for your vehicle. They should be read in conjunction with your crossbar instructions.

Kit Contains

- 1 x Set of assembly Instructions
- 2 x Front Clamps (with 2 holes)
- 2 x Rear Clamps

Items you may require that are not included:

- 1 x Tape measure

Maximum
Whispbar
Load
Rating

75
kg

Maximum
P-Bar
Load
Rating

65
kg

When Fitted and loaded
correctly

Fitting Instructions



- Use keys to remove covers.



- Use hex screwdriver supplied with crossbar to back off top locking screw for 10 turns.



3

- Using your thumb, press in the top locking screw and pull leg gently out until it stops.



4

- Remove bottom adjusting screw on foot.



5

- Fit two front clamps (with holes) to one crossbar and rear clamps to another crossbar.



6

- Refit bottom adjusting screw and engage spigot in to hole on top of clamp.
- Do not begin to tighten.




7

- Fit standard pad to feet.



8

- Press pad firmly onto foot by putting thumb pressure on area where pad spigots engage.

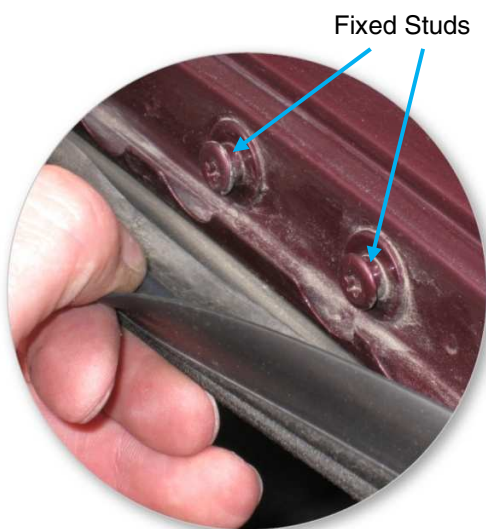

9

- Pull back door seal to gain access to fixed studs on vehicle body.



10

- Place crossbar with front clamps on vehicle roof.
- Slide each leg towards the centre of the vehicle while holding the crossbar. (leg will make clicking noise).
- Make sure both legs are positioned equally.
- As you are making adjustment of legs slip clamps over studs on vehicle body.
- Tighten top locking screw.
- Tighten bottom adjusting screws equally on each side.



11

- Place crossbar with rear clamps on vehicle roof.
- Repeat leg adjustment procedure.
- Position clamps in window aperture so that the clamps are fully engaged.
- Tighten top locking screw.
- Tighten bottom adjusting screws equally on each side.



12

- Make sure that crossbars sitting tight on roof.
- Refit covers to legs.

Crossbar Spacing

Pictured are Whipbar Flush Bars. Positioning also applicable for Whipbar Through Bars and P-Bars



Warning Notes:

WARNING: Check the Tightness of Screws Regularly