







Kit 1325

BMW 5-Series, 4-dr Sedan, 04-09

BMW 5-Series, 5-dr Touring, 04-09 (without railing)

BMW 5-Series, 5-dr Wagon, *04-09 (without railing)

*North America



THULE[®]
SWEDEN

ISO 11154-E

**Max.
75kg**
**Max.
165 lbs**

Kit XXXX

480R/754

480

750






591 x 2

595 x 2


137 x 4

503-1325-03 x 1

Kit

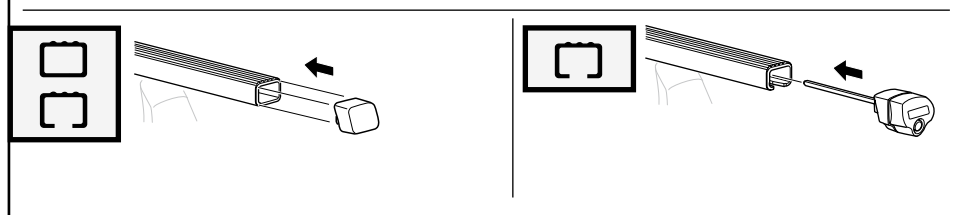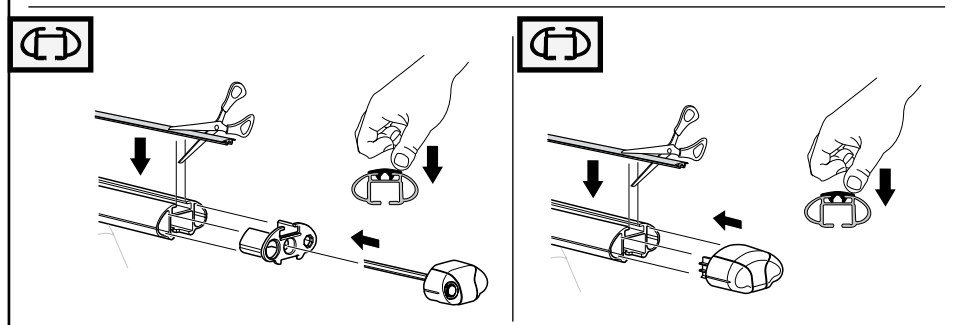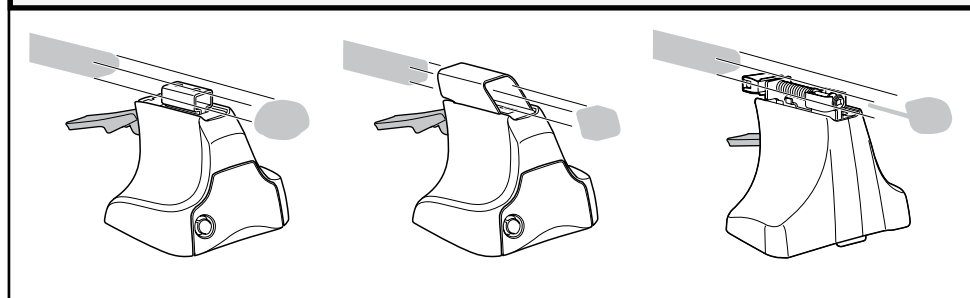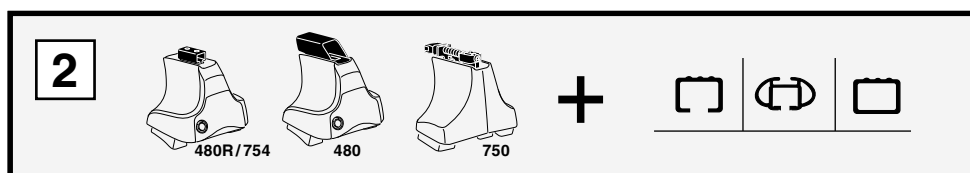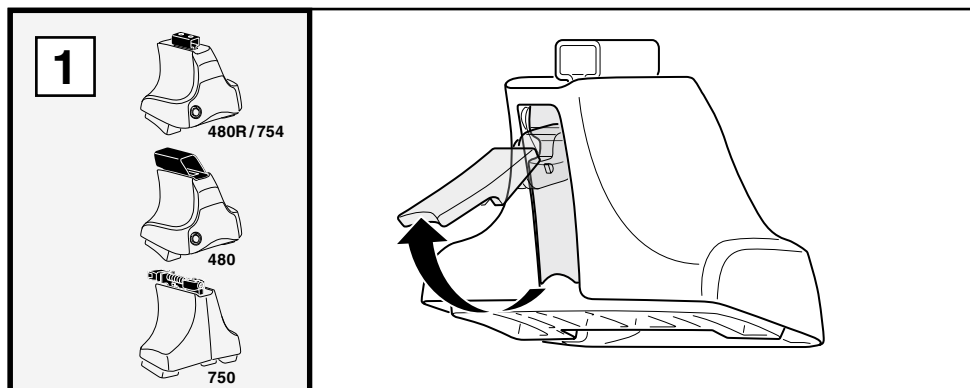

3




754



750



1



X

2




	X
BMW 5-Series, 4-dr Sedan, 04-09	36,5
BMW 5-Series, 5-dr Touring, 04-09 (without railing)	36,5
BMW 5-Series, 5-dr Wagon, *04-09 (without railing)	36,5

1



Y

2



	Y
BMW 5-Series, 4-dr Sedan, 04-09	36
BMW 5-Series, 5-dr Touring, 04-09 (without railing)	34
BMW 5-Series, 5-dr Wagon, *04-09 (without railing)	34




480R




480

1




X inch/mm

2




	X inch	X mm
BMW 5-Series, 4-dr Sedan, 04-09	40"	1016 mm
BMW 5-Series, 5-dr Touring, 04-09 (without railing)	40"	1016 mm
BMW 5-Series, 5-dr Wagon, *04-09 (without railing)	40"	1016 mm

1



Y inch/mm

2
















	Y inch	Y mm
BMW 5-Series, 4-dr Sedan, 04-09	39 ³ / ₄ "	1011 mm
BMW 5-Series, 5-dr Touring, 04-09 (without railing)	39"	991 mm
BMW 5-Series, 5-dr Wagon, *04-09 (without railing)	39"	991 mm

4


BMW 5-Series, 4-dr Sedan, 04-09

BMW 5-Series, 5-dr Touring, 04-09 (without railing)




BMW 5-Series, 5-dr Wagon, *04-09 (without railing)

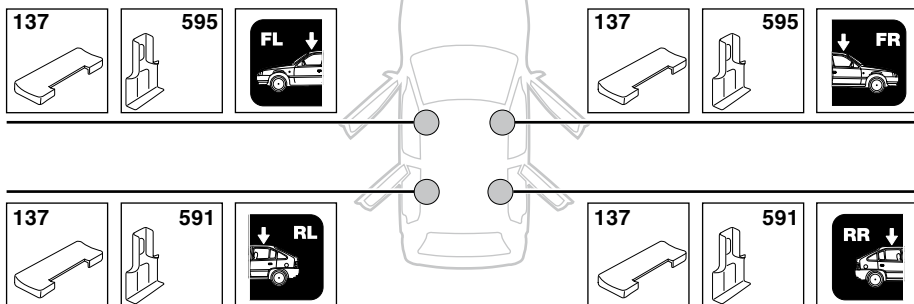

5

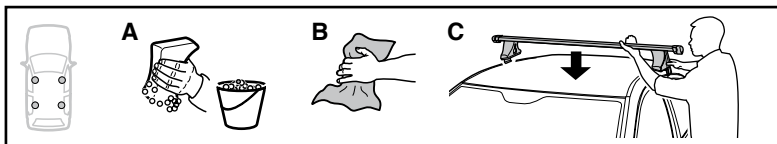

	X mm	Y mm	X inch	Y inch
BMW 5-Series, 4-dr Sedan, 04-09	270 mm	750 mm	10 5/8"	29 1/2"
BMW 5-Series, 5-dr Touring, 04-09 (without railing)	270 mm	700 mm	10 5/8"	27 1/2"
BMW 5-Series, 5-dr Wagon, *04-09 (without railing)	270 mm	700 mm	10 5/8"	27 1/2"

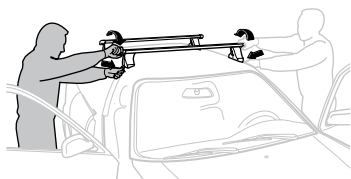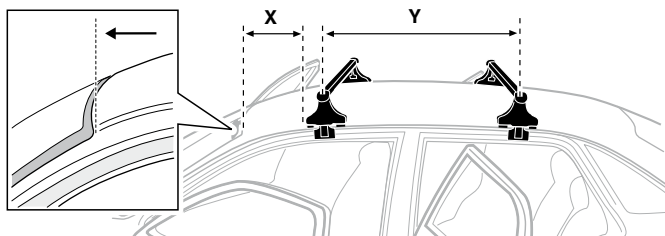

GB/US Tighten alternately

D Die Schrauben abwechselnd anziehen

F Serrer alternativement chaque côté

NL Afwisselend aan de linker- en de rechterkant aandraaien

I Alternare il serraggio delle viti

E Serrare alternativamente

PT Aperte alternadamente

S Dra åt växelvis

FIN Kierrä vuorotellen

EST Pinguldage vaheldumisi

LAT Pievelciot pamišus

LIT Užsukinėkite pakaitomis

PL Śruby dokręcaj naprzemiennie

RU Затягивайте попеременно

CZ Pokręťte bagażníka dokręcaj dokręcaj naprzemiennie.

SK Doťahujte striedavo

SLO Privijajte izmenično.

HR Naizmjenično zategnite

HU Egymástól függetlenül szorítandó

GR Σφίγγετε εναλλάξ

TR Dönüşümlü sıkın


中文 交替拧紧

한국어 번갈아 가며 조이십시오.

日本語 交互に締め付けてください。

ไทย ขันในแบบสลับ









6



480R/754










480

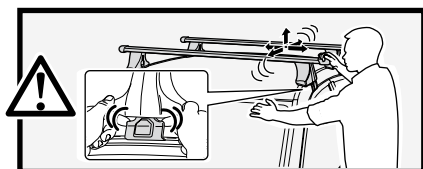
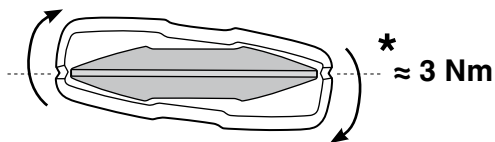

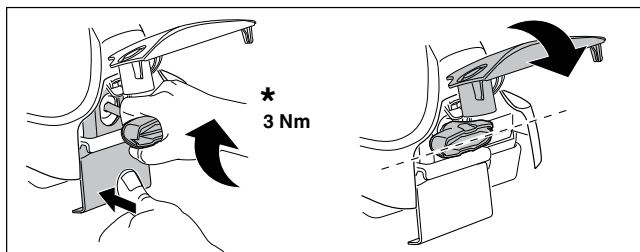



7



x1
17 mm

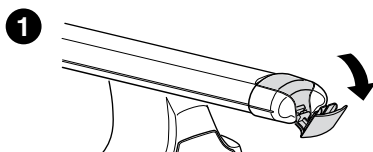

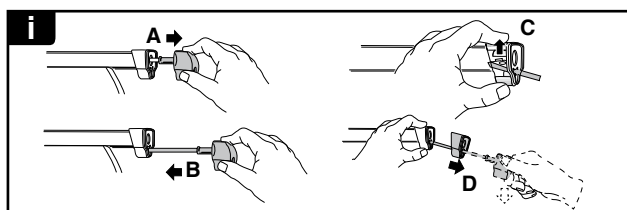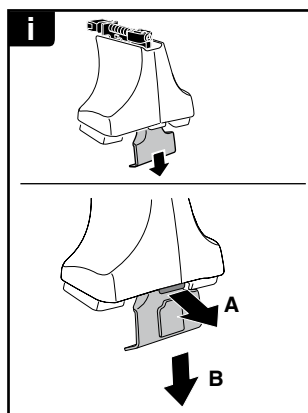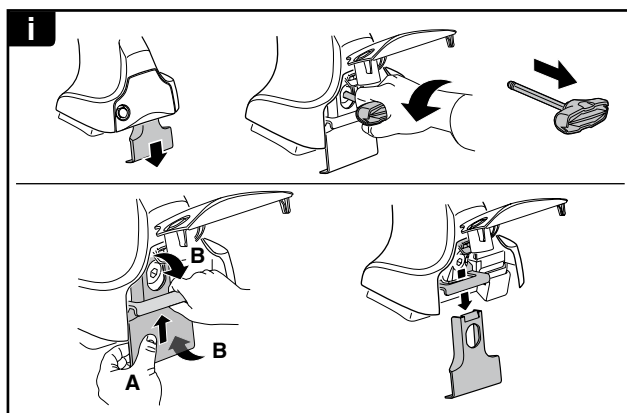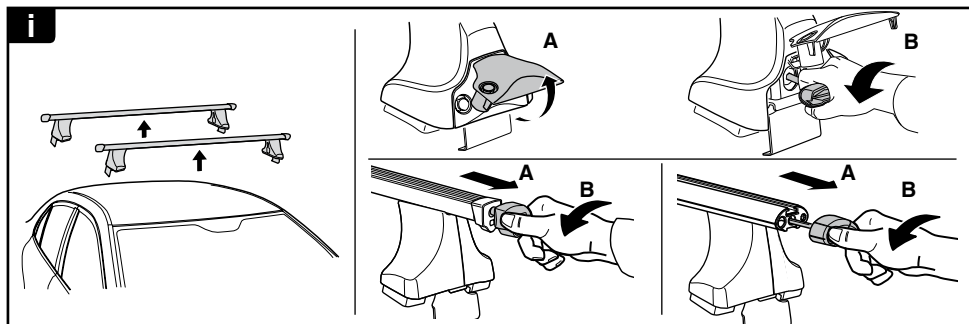

THULE[®]
SWEDEN

**ONE
KEY
SYSTEM**

		544 (x4)
		596 (x6)
		588 (x8)
NA		510 (x10)
EUR		452 (x12)
ASIA		