



CONGRATULATIONS!

You have purchased a state-of-the-art product for you and your four-legged companion to enjoy together. The Comfort wagon, with its captivating Italian design, multiple uses, and a marked emphasis on safety, will open up a whole new world of activities for you and your special friend.

Before you get on the road, look at some of the technical features of the Comfort Wagon.

Light Weight	L=17.00 KG / 37.47 lb M=16.00 KG / 35.27 lb
Open Dimensions	L= 35l x 26w x 24h (+7" with wheel) M= 34l x18w x22h (+6" with wheel)
Storage Dimensions	L=35x26x10 - M=34x18x10
Wheel Diameter	Rear Wheels=16' Front Wheel=10'
Materials	Alloy frame, Alloy Rim, inflatable tire, Alloy Quick release axle with Sealed bearings, with Nylon fabric tent and mesh enclosure
Brake	There is a belt, which straps through the wheel in order to prevent the wagon from rolling when stopped.
Practicality and Comfort	It is quickly and easily collapsible, allowing you to switch from bike trailer mode, to car dog cage (extracting the wheels and detaching the towing bar, or to store it at the end of your walk with a minimum of inconvenience. Handle adjustability: You can set the height of the handle as desired so as to avoid any aches and pains after longer walks.

COMFORT WAGON ASSEMBLY INSTRUCTIONS

Assembling your new Comfort Wagon is quick and easy!

All you will need is your hands to do it!

First, remove the contents from your Comfort wagon's box.

Inside you should find the following pieces:

1. Car Frame 2.Rear wheels 3. Towing bar

The stroller kit (sold separately) contains the following pieces:


4. Front wheel 5. Handlebar

(Noter: the Handlebar and Front Wheel are included only if you purchased the optional Stroller Kit.)



First Step: Car Frame assembly

1. Open the Structure, pull up the two 'swing' top bars that have to be appropriately connected together.

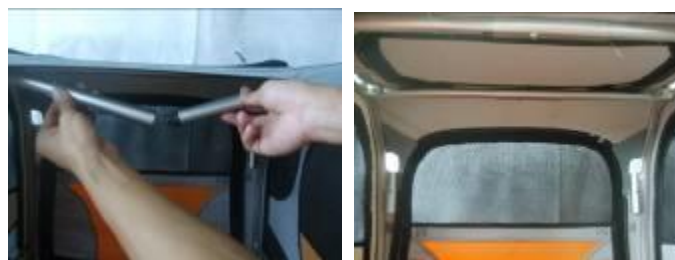

2. After assembling the frame, use the belt sticker to lock the foot tube .



Second step: 'Front leg' assembly

The hole of the front leg meet the hole of the frame, use the bolt to lock the front leg and frame.



Third step: Rear wheels assembly

1. Insert the wheel's steel shaft into the car's axel pipe, press the rubber for the wheels and push hard the wheel-set all the way to the end.



2. Unclip the belt, loop around the rim and tire clip back on the d-ring



Fourth step: Towing bar assembly

Insert the tube of the Towing bar into the car's axel pipe, push hard the wheel-set all the way to the end. And the frame has to be locked by inserting the chrome safety pin.



Fifth Step: Bicycle connection

Take out the quick release of the bike, and put it through the towing bar and bike and lock it. Use the belt to fixed the bike and towing bar directly.



If you Want to take out the Comfort Wagon without Bike, just assemble the handlebar and Front wheel as below:

First Step: Take away the Towing bar form the bike and car frame with the same way.

Second Step: Handlebar assembly



1. Take out two handlebars, insert and press one of the handlebar's bolt to the hole of another.



2.Put two sizes handlebar tube insert in to frame, and the bolt of the handlebar should connected with the frame tube properly. Use two hands to press the plastic button of the handlebar could adjust the height of the handlebar.



Third Step: Front wheel assembly

Insert the tube of the front wheel into the car's axel pipe, push hard the wheel-set all the way to the end. And the frame have to be locked inserting the chrome safety pin



Comfort Wagon

