


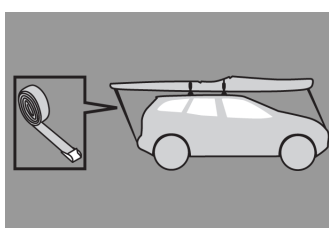



EN Fitting Instructions for Basic Carrier




11-02-233

x 6




x 12



x 12



x 6



x 6



x 6

+ + = **MAX**
kgs (lbs)



Nissan

- Primastar SWB, 5dr Van 06-May 15
- Primastar SWB, 5dr Van 07-May 15
- Primastar SWB, 5dr Van 07-May 15




Renault

- Trafic SWB, 5dr Van 06-May 15
- Trafic SWB, 5dr Van 06-May 15
- Trafic SWB, 5dr Van 06-May 15
- Trafic SWB, 5dr Van 06-May 15


Opel

- Vivaro SWB, 5dr Van 06-May 15
- Vivaro SWB, 5dr Van 06-May 15

Flag	MAX kgs (lbs)	
	W/P	WHD
EU	75 kgs (165 lbs)	75 kgs (165 lbs)
AU	75 kgs (165 lbs)	75 kgs (165 lbs)
ZA	75 kgs (165 lbs)	75 kgs (165 lbs)
AU	75 kgs (165 lbs)	75 kgs (165 lbs)
EU	75 kgs (165 lbs)	75 kgs (165 lbs)
ZA	75 kgs (165 lbs)	75 kgs (165 lbs)
CN	75 kgs (165 lbs)	75 kgs (165 lbs)
EU	75 kgs (165 lbs)	75 kgs (165 lbs)
ZA	75 kgs (165 lbs)	75 kgs (165 lbs)

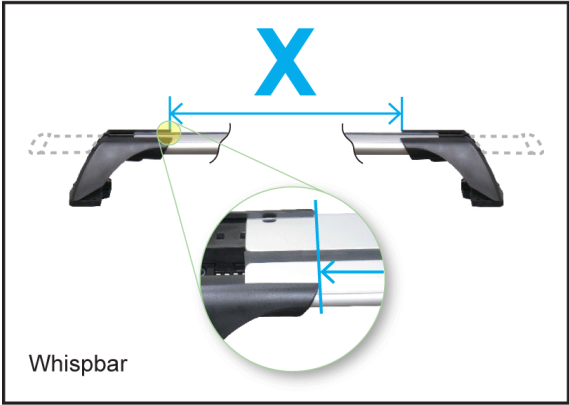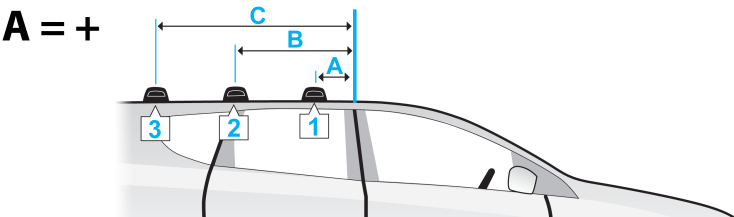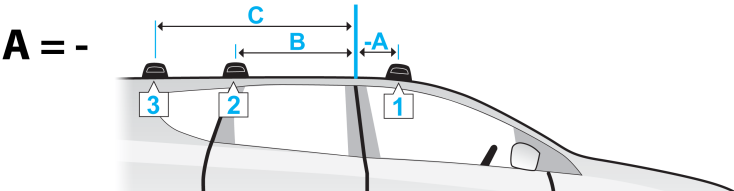

Whispbar

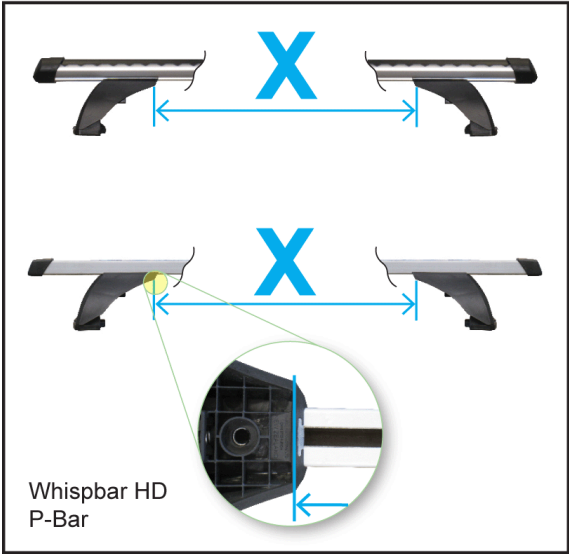

Whispbar HD
P-Bar

Primastar SWB, 5dr Van 06-May 15 (EU)

Primastar SWB, 5dr Van 07-May 15 (AU)

Primastar SWB, 5dr Van 07-May 15 (ZA)

Trafic SWB, 5dr Van 06-May 15 (AU)

Trafic SWB, 5dr Van 06-May 15 (EU)

Trafic SWB, 5dr Van 06-May 15 (ZA)

Trafic SWB, 5dr Van 06-May 15 (CN)

Vivaro SWB, 5dr Van 06-May 15 (EU)


Vivaro SWB, 5dr Van 06-May 15 (ZA)

X					
A	B	C	1	2	3
645mm	1430mm	1920mm	1240mm	1240mm	1240mm
25 3/8ths"	56 5/16ths"	75 9/16ths"	48 13/16ths"	48 13/16ths"	48 13/16ths"
645mm	1430mm	1920mm	1240mm	1240mm	1240mm
25 3/8ths"	56 5/16ths"	75 9/16ths"	48 13/16ths"	48 13/16ths"	48 13/16ths"
645mm	1430mm	1920mm	1240mm	1240mm	1240mm
25 3/8ths"	56 5/16ths"	75 9/16ths"	48 13/16ths"	48 13/16ths"	48 13/16ths"
645mm	1430mm	1920mm	1240mm	1240mm	1240mm
25 3/8ths"	56 5/16ths"	75 9/16ths"	48 13/16ths"	48 13/16ths"	48 13/16ths"
645mm	1430mm	1920mm	1240mm	1240mm	1240mm
25 3/8ths"	56 5/16ths"	75 9/16ths"	48 13/16ths"	48 13/16ths"	48 13/16ths"
645mm	1430mm	1920mm	1240mm	1240mm	1240mm
25 3/8ths"	56 5/16ths"	75 9/16ths"	48 13/16ths"	48 13/16ths"	48 13/16ths"
645mm	1430mm	1920mm	1240mm	1240mm	1240mm
25 3/8ths"	56 5/16ths"	75 9/16ths"	48 13/16ths"	48 13/16ths"	48 13/16ths"

First Time Installation



- Remove parts from inside the package and check. Contact your dealer if any parts are missing or damaged.

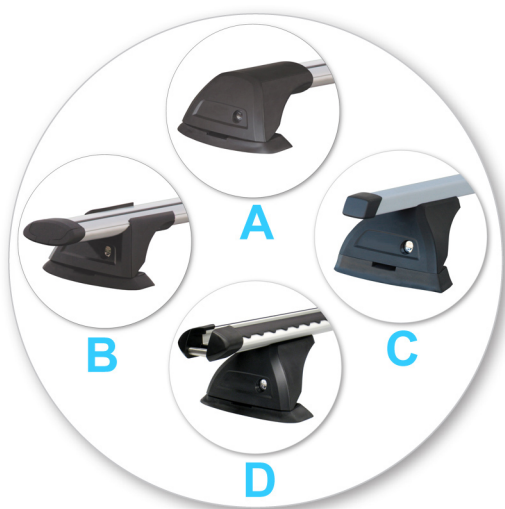

- This kit fits type A, B, C and D.
- These instructions show type A crossbar fitted. They also apply to type B, C and D.




- Use keys to remove covers.



- Use hex screwdriver to reverse adjusting screw 10 turns.




- Press adjusting screw and pull crossbar legs out. Refer to the crossbar instructions for crossbar adjustment method.
- Ensure each end of the crossbar is adjusted equally.

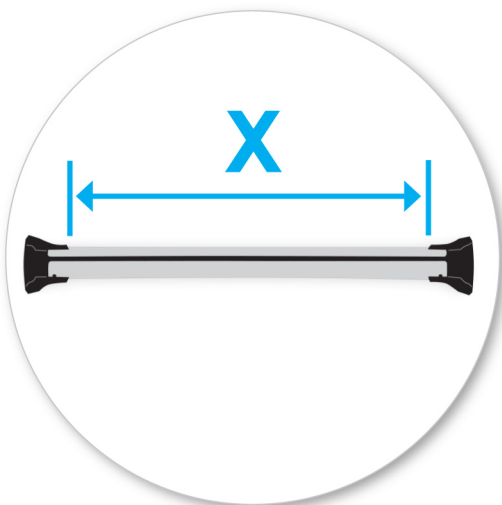

- Set bars to length (revert to rear of these instructions).
- Please check the front of this manual for information relating specifically to your vehicle.




- Tighten adjusting screw to 5 Nm (3.7 ft lb) hand tight.

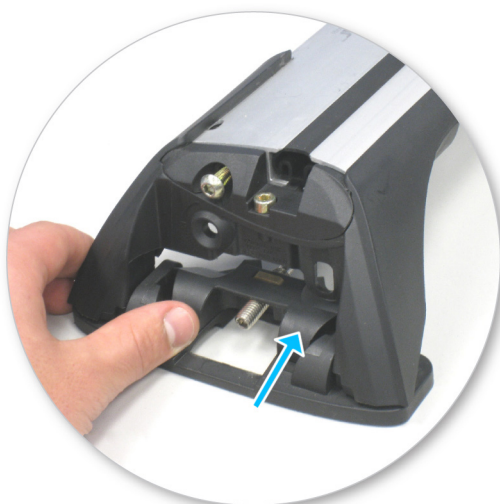


- Remove plastic clamp block by gripping bar leg with fingers and push firmly with thumbs until clamp block drops out behind leg.



- Select plastic internal block (from fitting kit) and insert into foot.
- Repeat for all legs.

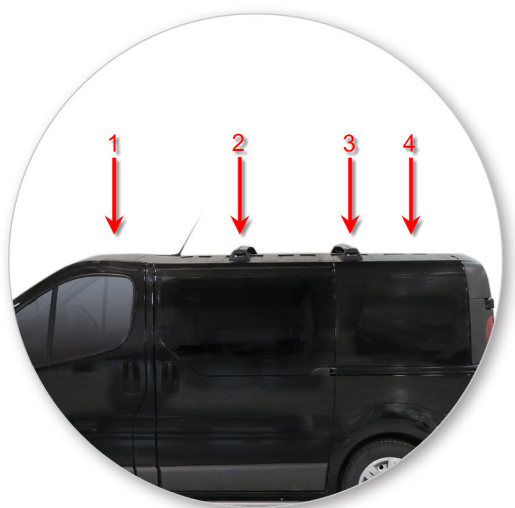

- For a two bar setup, use position 2 and 3. For a three bar setup, use position 2,3 and 4.

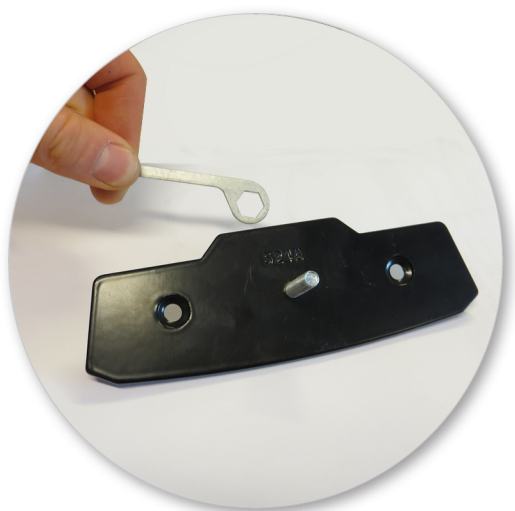


- Screw bolt in base plate, make sure the number is on the top side. Use the spanner from inside the cover to fully tighten the bolt.




- Slide nut under fixed-point mount



- Place mounting block into position as shown.

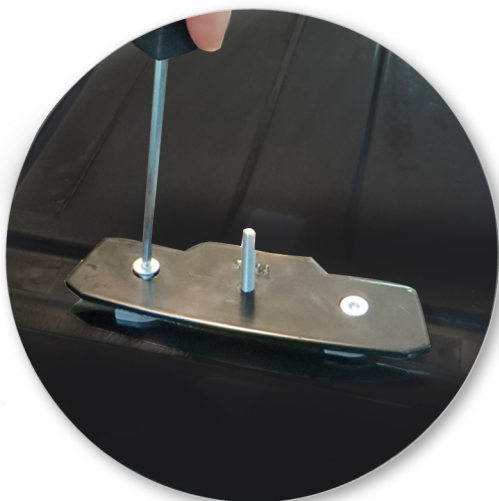

- Place screws into position.
- Tighten both screws evenly.

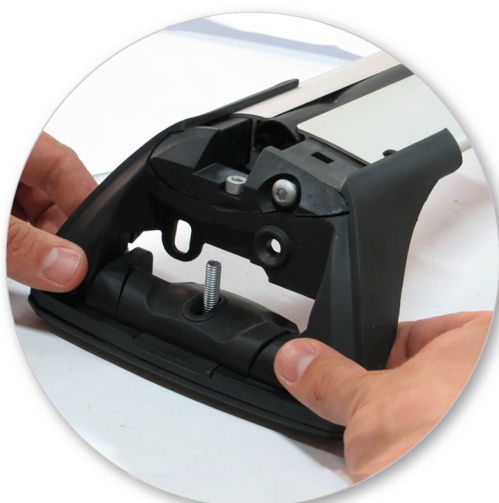

- Place crossbar foot over grubscrews.

- Tighten the plastic knob.



- Ensure the plastic knob is in the position shown when fully tightened.



- Check crossbar is securely attached to the vehicle.
- Use keys to fit and lock covers



**CAUTION: Recheck all fasteners immediately after a load is applied to the crossbars.
Regularly check screws are tight.**

Maintenance

- Clean the car roof and surfaces of the product that will be in contact with the car roof.
- Follow the fitting instructions for fitting the product to your vehicle. Make sure all steps are carried out in order.
- Set crossbars a minimum distance of 700mm (27 1/2") apart where no other distance is specified in the fitting instructions. This is especially important when carrying long loads.
- Check unit is securely attached whenever you refit it to the vehicle. If the unit feels loose, refer to the fitting instructions and readjust.
- Some glass/panoramic roofs and radio antennae may not be able to be used when the product is fitted.
- Do not modify this product.
- Refer to the maximum permitted load capacity specified in the fitting instructions. Do not exceed the vehicle manufacturers roof load rating if it is lower than the maximum load capacity specified in the fitting instructions.
- Loads should not overhang the sides of the product and be evenly distributed with the lowest possible centre of gravity.
- Long loads should be secured with non-elastic straps to the front and rear of the vehicle.
- Objects with pointed ends (e.g. ski poles) should be carried with the pointed ends to the rear of the vehicle.
- Remove all loose or removable objects from the load prior to loading.
- Make sure all loads are securely fastened with non-elastic straps. Check regularly during longer journeys.
- A loaded roof rack system can alter the performance of your vehicle. Be especially aware of the effects of side winds, changing of direction, and braking performance. Avoid rapid acceleration and deceleration. Drive carefully.
- Note that the total height of the vehicle increases when upright loads are carried.
- Products should be locked during transport if they have locks fitted.

- Check and replace worn out or defective parts.
 - Keep the product clean and maintained.
 - Never drive into a car wash with the roof rack system fitted.
 - Lubricate locks and adjusting screws at regular intervals.
 - Remove the products from the vehicle when not in use. Make sure all loose parts are stored safely.
-

- Yakima Europe Coöperatief U.A.
Archimedesbaan 25
3439 ME Nieuwegein
The Netherlands

+31 2080 81425

www.whispbar.eu
www.whispbar.co.uk

- Yakima Products, Inc.
4101 Kruse Way,
Lake Oswego, OR 97035
USA

www.whispbar.com
www.whispbar.ca
