Installation Settings

JETSTREAM CROSSBAR WITH SKYLINE MOUNT HYUNDAI 130 5 DOOR HATCH 2012 - 2017 (NAKED ROOF)

MEASUREMENTS

Front Crossbar			Rear Crossbar	
M1 Inner edge of driver's side passenger's side leg	890 mm	соол M3	Inner edge of driver's side leg to inner edge of passenger's side leg	852 mm

N/A




Front Crossbar

Corner of painted or glass roof to leading edge of front pad or foot



Crossbar Spread

Rear edge of front crossbar	795
to rear edge of rear	mm
crossbar.	

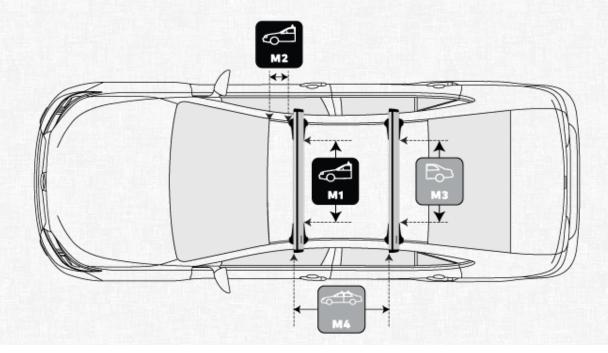

PITCH SETTINGS Pitch 2 Pitch 1 \mathbb{E} 5 Adjustment on the front Adjustment on the rear legs Δ B to help keep the crossbars legs to help keep the Ρ1 Ρ2 crossbars level level -6' œ ¢

LANDING PAD DETAILS (LP22)



Pad Type

Part number to indicate which pad shape to use

5023013



Front Bolts

Which bolts from the pack are required to secure the front bar

N	/6x3	3
n	nm	

N/A

¢ the

Pad Orientation


Indicates which way to place the pads on the vehicle

Arrow OUT <II>



Mid Bolts (3 Bar Fits only) Which bolts from the pack are required to secure

middle bar in 3 bar fits



Washer

Washers to be used on each bolt to secure the bar/s

M6



Rear Bolts

Which bolts from the pack M6x33 are required to secure the rear bar