

Do NOT use a YAKIMA SKYRISE TENT ON PLAIN ROOF VEHICLES

# READ ME FIRST!

US

For your safety register your new product online at: [www.yakima.com/warranty-registration](http://www.yakima.com/warranty-registration)

## FIRST OFF, THANKS!

Welcome to the Yakima family. We appreciate your support and are confident that you'll get years of solid performance from your new Yakima product. Below are a few helpful hints to make sure that you have a great ownership experience. Please keep these instructions.

**WATCH FOR THESE SYMBOLS!**



**= SAFETY** – Keep safe by reading the important safety warnings included in the product instructions! Safety warnings are identified with this symbol.

**= STOP** – Please read all important product notes in the product instructions to ensure proper installation or fit information. These notes are identified with this symbol.

## SOME DO'S AND DON'TS (additional warnings are contained in these instructions)

- Do have a friend or dealer help with installation.
- Do use the tent when parked on level ground.
- Do remove the tent when not in use.
- Do dry the tent before storage.
- Do use the tent on level ground.
- Do close the tent cover fully before driving away.
- Do assist children on the ladder.
- Do close and secure the cover before driving.
- Do not climb on your vehicle's roof.
- Do not use the tent unless ladder is securely in place.
- Do not allow more than one adult on the ladder at a time.
- Do not use the tent in high-winds or heavy-snow.
- Do not transport anything on top of the closed tent.
- Do not use an open flame nor cook inside tent.

## IMPORTANT FIT INFORMATION

**WARNING: DO NOT USE THIS PRODUCT ON A VEHICLE THAT IS INDICATED AS "NO-FIT".**

The Yakima Fit-List now includes approved SkyRise™ fits for many popular vehicles. Updates and additions to the Yakima Fit-List for rooftop tents are being made continually. **Please go to [fitlookup.yakima.com](http://fitlookup.yakima.com) for latest updates.**

Vehicles that we have seen and tested are designated as "FIT" or "NO-FIT" for SkyRise™. **Fits for SkyRise are different than for other Yakima products. Please note that virtually all factory crossbars are too flexible for rooftop tents. So vehicles approved in the Fit-List will still require a Yakima roof-rack system.** If we have not tested your particular vehicle and rack system, you can use the checklist below to evaluate whether your vehicle and rack system may support a SkyRise.

Remember, the checklist below is designed to be a guideline only and any installation not on our approved Fit-List is at the sole risk and responsibility of the owner or installer.

- The vehicle and rack system have a minimum load carrying capacity of 165 lbs.
- The following Yakima towers may be used: TimberLine™, SkyLine™, RidgeLine™, RailGrab™ (med. or large claw), ControlTower™, LowRider™, 1A Raingutter™, BedRock™, and Outdoorsman™.
- You may use SkyRise with Yakima RoundBar™, CoreBar™, or JetStream bars™.
- For factory-tracks or fixed-points (see figure 1), ensure that the roof does not deform when heavy loads are applied.
- For vehicles with raised-rails, position the crossbars as close as possible to rail supports.
- Ensure that the crossbar spread is between 26" and 40.5".
- Do not use a rooftop tent with any clamp type towers (including Q-Tower™ and BaseLine™) or RailGrab™ Towers with Small Claw or Pin Adapters.**
- Do not use with factory-crossbars, they are too flexible.
- Do not position the mounting hardware more than 1" outside of the Tower (see figure 2).
- The maximum distance from top of the crossbar to the ground for SkyRise Small is 86" and 98" for SkyRise Medium.
- Do not install SkyRise™ on cantilever rails or rails without sufficient support (see figure 3).

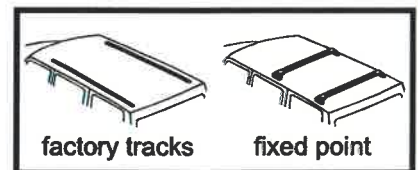


fig. 1

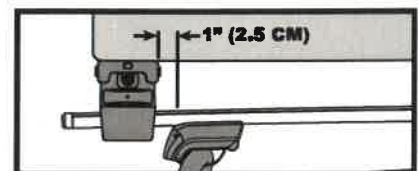


fig. 2



fig. 3